

苏州爱瓦

巴

目

苏州爱瓦特文具有限公司



GB755, BS5000, VDE0530, NEMMG1-22, IED34-1, CSA22 2 AS1359



: /

3

Y

1

0.8

IP23

1000m

/

TIF

50


THF

2%

225KVA

97.8%

0.8m³/s



± 5%

± 1%

100%

+25%

-20%

6S

1%

5%

1.5%

100%

+12%


-10%

5S

MCCB


PMG

“ ”
ATS

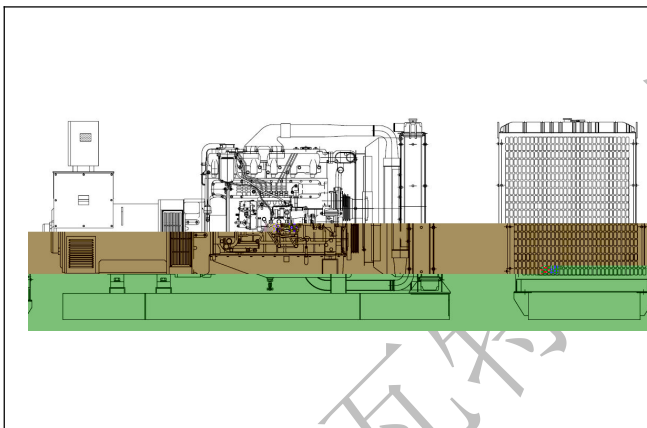

2700 mm × 900 mm × 1800 mm
2300kg

2850 mm × 1000 mm × 1920 mm
2450kg

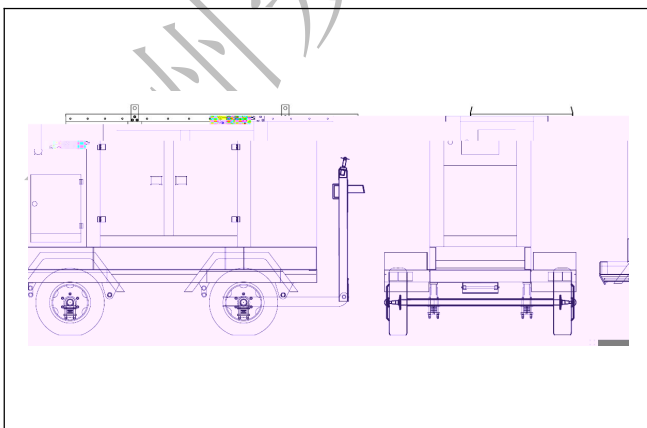

3250 mm × 1250 mm × 2150 mm
2860kg

3660 mm × 1880 mm × 2670 mm
3350kg



标准型机组控制屏是满足机组正常操作、使用的最基本配置，具有操作简便、功能齐全、保护可靠等优点。功能特点：采用众智控制器；显示屏；机组具有手动开机、关机（急停）等控制功能，具有油压低、水温高、超速、电压高、电压低、过流等多种保护功能，可满足各种机组的需要。



ATS

